


# 6" Round Bullet Resistant Speak-Thrus

- Made of Heavy Stainless Steel with Brushed Finish
- Louvers Spaced to Deflect Projectiles
- Level 3 Bullet Resistance (.44 Magnum)

This 6" diameter Speak-Thru is designed for use with bullet resistant glass, acrylic or polycarbonate. Made of heavy stainless steel, the concentric circular louvers are spaced to deflect projectiles entering the cavity between the interior and exterior surfaces without interfering with conversation. Accommodates glazing thicknesses from 1-3/16" to 1-7/8". Optional Spacer Rings (shown below) are available for use with glazing materials less than 1-3/16" thick.




DESIGNED, ENGINEERED AND MANUFACTURED IN THE USA  
 CERTIFIED ISO 9000 COMPANY

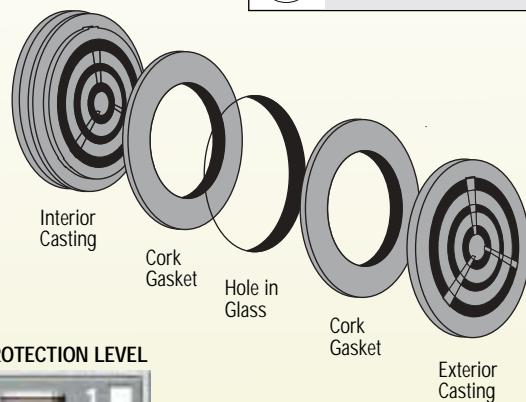

**SPECIFICATIONS:**

**Material:** Stainless Steel  
**Finish:** Brushed Stainless Steel  
**Bullet Resistance:** Level 3  
**Instructions Included**  
**Glass Fabrication Required**

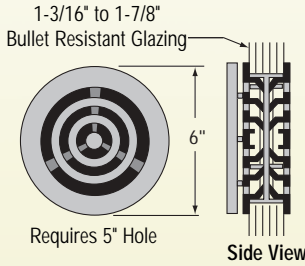

**PROTECTION LEVEL**



CAT. NO.	DESCRIPTION
N666	6" Round Speak-Thru

## Optional Spacer Ring for N666 Speak-Thrus

- Allows the Use of N666 Speak-Thru with Glazing Less Than 1-3/16" Thick

Solid aluminum Spacer Ring used when installing our N666 6" Round Bullet Resistant Speak-Thru in glazing less than 1-3/16" thick. Depending on the thickness of the glazing material, either one or two rings will be required. Be sure to check Glazing Thickness Range in chart below before ordering.



**SPECIFICATIONS:**

**Material:** Aluminum  
**Finish :** Brushed Aluminum  
**Instructions Included**  
**Glass Fabrication Required**

CAT. NO.	GLAZING THICKNESS RANGE	SPACER TYPE
SR666212	1/4" to 3/8"	Two 1/2" Thick
SR666238	7/16" to 5/8"	Two 3/8" Thick
SR666214	11/16" to 7/8"	Two 1/4" Thick
SR666114	15/16" to 1-1/8"	One 1/4" Thick

